PRODUCT CATALOGUE

/ OFFICE FIXTURES

/ INDUSTRIAL FIXTURES

/ OUTDOOR FIXTURES

ADVANCED SOLUTIONS FOR THE EXACTING





We are pleased to present you with our investment offer catalogue. As experts in our field, we offer industry specialists high-quality fixtures - a brand you can rely on.

With energetic regards **Kobi Light**

LED PANELS LED replacements for grid fixtures are a timeless solution for office spaces and beyond. In our offer, you will find models with the option of a 3 and 5-year warranty, certified by the National Institute of Hygiene (PZH), and available in the **DALI** variant.

BRISBANE

- 2in1 panel recessed and surface mounting possible,
- light distribution: 120°,
- color temperature: 4000K,
- size: 60x60 cm or 30x120 cm,
- available in black and white.









CAPRI

- light distribution: 90° or 120°,
- color temperature: 4000K,
- size: 60x60 cm or 30x120 cm,
- UGR version <19,
- IP65 variant available.



EFFICIENCY
120 lm/W

28-50 WATT

NELIO

- ultra thin: 10 mm,
- light distribution: 120°,
- color temperature: 4000K,
- size: 60x60 cm,
 30x60 cm or 30x120 cm.



EFFICIENCY 110 lm/W **28-40** WATT

ORIO

- 4-level power supply adjustment,
- light distribution: 120°,
- ullet color temperature: 4000K,
- size: 60x60 cm.







CAMARO

- cost-efficient led panel,
- light distribution: 120°,
- color temperature: 4000K,
- size: 60x60 cm.





40 WATT







NEXLINE SLIM

- Fixture with integrated **LED SAMSUNG diodes**,
- size: 120 cm,
- light distribution: 120°,
- color temperature: 4000K,
- capability of connecting fixtures (up to 20 units).









LINEAR FIXTURES

Nexline Slim and Koline linear fixtures are products with a five-year warranty period. They allow for suspended or surface -mounted installation.

Depending on the model, fixtures can have a prismatic diffuser or added reflectors. They can be linked seamlessly in a line.

KOLINE

- light distribution: 90° or 105°,
- color temperature: 4000K,
- size: 120 cm,
- capability of connecting fixtures (up to 20 units) variant on request.



EFFICIENCY
120-130 lm/W



PLAFONDS

Corridors, stairwells, as well as office spaces are places where surface-mounted ceiling lights and recessed fixtures are applicable.

Variants with an integrated motion sensor and an extended warranty period are just few examples of our wide product portfolio.





SIGARO

- light distribution: 120°,
- color temperature: 4000K,
- available in recessed and surfacemounted versions.









DEFENDER

- LX version with a microwave motion sensor with adjustable operation time, light intensity, and detection sensitivity,
- light distribution: 120°,
- color temperature: 4000K,
- size: ø 300 mm,
- ingress protection: IP66.





18-24 WATT



- light distribution: 120°,
 size: ø200/ø300/ø400,
- ingress protection: IP65,
- available version with a sensor adjustable via remote control.
- adjustable color temperature 3CCT: 3000/ 4000/6500K.



12-36 WATT

EFFICIENCY (WHITE/BLACK) 105/95 Im/W

NEXEYE

- light distribution: 110°,
- color temperature: 4000K,
- size: ø 140/ø 190/ø 228 mm,
- the fixture maintains an **IP44** protection rating in the case of recessed installation,
- version with a DALI power supply.











ANICA

- light distribution: 90° or 120°,
- color temperature: 4000K,
- size: ø 280/ø 320/ø 360 mm,
- built-in **ZHAGA socket**,
- ingress protection: IP65.









100/150/200 WATT



NINA

- light distribution: 90° or 120°.
- color temperature: 4000K,
- size: ø 240/ø 280/ ø 320 mm,
- ingress protection: **IP65**.









RIO PRO

- light distribution: 120°,
- color temperature: 4000K,
- size: ø 240/ø 285/ø 325 mm,
- SAMSUNG LED diode,
- ingress protection: IP65,
- mechanical resistance: IK10.



EFFICIENCY 140 lm/W

100/150/200 WATT






NICO

- High Bay linear luminaire,
- light distribution: 60°x90°,
- color temperature: 4000K,
- size: 547x150x130 mm,
- ingress protection: **IP65**.



EFFICIENCY 170 lm/W

120 WATT

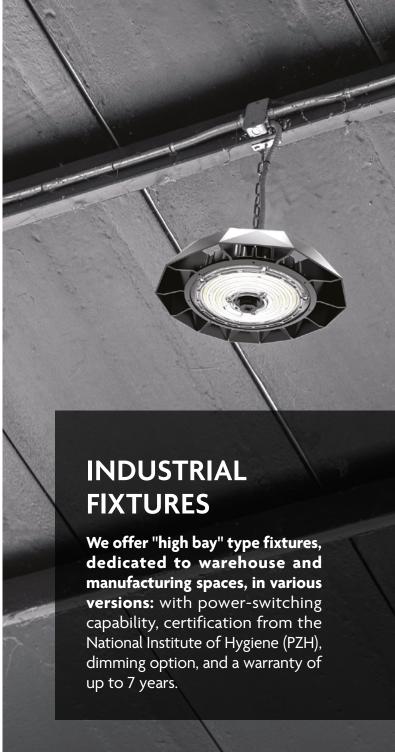

INDUSTRIAL LINEAR FIXTURES

In more demanding conditions, industrial linear fixtures excel, offering a high level of resistance to dust and moisture penetration.



NEGRO

- concealed waterproof connection,
- light distribution: 120°,
- color temperature: 4000/6000K,
- ingress protection: **IP65**.



EFFICIENCY 120 lm/W

20-60 WATT

LED CORTEZ 3

- color temperature: 4000K,
- light distribution: 120°,
- ingress protection: IP65,
- certified by the National Institute of Hygiene (PZH).



EFFICIENCY 100 lm/W

18/36/45 WATT

veschieren...

Wondering how to save money? Remember that choosing the cheapest offer doesn't always pay off.





Quality matters!

LED T8 Kobi®




DUAL-LAYER COATING

glass with good heat dissipation



thin layer of heatconductive **PBT plastic for** breakage protection

wide 240°



aluminum PCB plate, high-efficiency LED

CCG CONVERTER

NO FLICKERING

SHORT-CIRCUIT PROTECTION

color rendering index **RA>80**

PARAMETER COMPARISON

LED T8

NO PBT COATING

glass only, without a protective layer against breakage



narrow beam angle 160°

epoxy PCB plate, low-efficiency LED

RC RECTIFIER CIRCUIT



FLICKERING

NO SHORT-CIRCUIT PROTECTION



rendering index





- size: 60/120/150 cm,
- ingress protection: IP65,
- replaceable light source.



2 YEARS WARRANTY


LED T8 PREMIUM

- color temperature: 3000/4000/6500K,
- size: 60/120/150 cm
- can work with a magnetic ballast when using a KOBI starter.







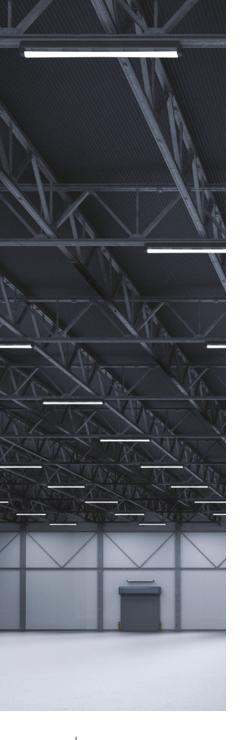

NEXFORCE

- ingress protection: IP65, with integrated LED diodes,
- size: 60/126/156 cm,
- light distribution: 120°,
- color temperature: 4000K,
- through-wirin **FAST CONNECT**.





20-80 WATT



HPL

- single or double fixture,
- light distribution: 90° or 120°.
- color temperature: 4000/5000K
- ingress protection: **IP65**.











LED NEXFORCE

12 x 60W

gives you

150 lm/W

needs only

0,72 kW

LED T8

42 x 36W

gives you

53,3 lm/W

needs "only"

1,512 kW

provided comparison data was calculated for LED NEXFORCE 60W and LED T8 36W installed in a 200 m² warehouse area with no additional lighting

LED NEXFORCE feel the power of saving

OUTDOOR FIXTURES

We provide street fixtures with road and parking light distribution, and an extended warranty. We also have solar street fixtures controlled by remote an power supplies compatible with the DALI system in our offer.



VESPA PRO

- possibility of adjusting the luminaire by 180°,
- installation on poles, brackets ø 60 mm,
- light distribution: 140°x90°,
- color temperature: 4000K,
- ingress protection: IP66.





40-200 WATT







- solar LED fixture with motion and light intensity sensor - remote-controlled,
- light distribution: 140°x 70°,
- color temperature: 4000K,
- replaceable battery LiFe P04 9,6V/12000 mAh,
- ingress protection: IP65.



EFFICIENCY 120 lm/W

15/40 WATT



MASTER STREET

- includes a built-in DALI2 power supply and a NEMA 5P socket,
- light distribution: 150°x75°,
- color temperature: **4000K**,
- ingress protection: IP66.

5-7 YEARS
WARRANTY

EFFICIENCY 170 lm/W

35-120 WATT





SEUL

- light distribution: 110°,
- color temperature: **4000K**,
- ingress protection: **IP65**.



EFFICIENCY 130 lm/W

50-200 WATT



US DIM

- light distribution: 60 or 90°,
- option to exchange the lens for 25° or 55°x125°,
- color temperature: 5000K,
- ingress protection: **IP66**.







EFFICIENCY 150 lm/W **300/500** WATT





		SODIUM LAMP	METAL HALIDE LAMP
POWER	500 W	750 W	1 100 W
EFFICIENCY	150 lm/W	100 lm/W	75 lm/W
LED LIFE SPAN	110 000 h	25 000 h	12 000 h



KOBI LIGHT SP. Z O. O. 35-105 RZESZÓW, UL. BOYA-ŻELEŃSKIEGO 2

