

PRODUCT CATALOGUE

/ OFFICE
FIXTURES

/ INDUSTRIAL
FIXTURES

/ OUTDOOR
FIXTURES

ADVANCED SOLUTIONS FOR
THE EXACTING

kobi 





We are pleased to present you with
our investment offer catalogue.
As experts in our field, we manufacture
quality fixtures for specialists
of the industry - on a brand you can
rely on.

With energetic regards
Kobi Light

LED PANELS

LED replacements for grid fixtures are a timeless solution for office spaces - and beyond.

In our offer, you will find models with the option of a **3-year and 5-year warranty, certified by the National Institute of Hygiene (PZH), and available in the DALI variant.**

BRISBANE

- **2in1 panel** - recessed and surface mounting available,
- beam angle: **120°**,
- color temperature: **4000K**,
- size: **60x60 cm** or **30x120 cm**,
- available in black and white.

3-YEAR
WARRANTY

EFFICACY
110-120 lm/W

36
WATT



CAPRI

- beam angle: 90° or 120°,
- color temperature: 4000K,
- size: 60x60 cm or 30x120 cm,
- UGR <19 available,
- IP65 variant available.



3-5-YEAR
WARRANTY

EFFICACY
120 lm/W

28-50
WATT

NELIO

- ultra thin: 10 mm,
- beam angle: 120°,
- color temperature: 4000K,
- size: 60x60 cm, 30x60 cm or 30x120 cm.



3-5-YEAR
WARRANTY

EFFICACY
110 lm/W

28-40
WATT

ORIO

- 4-level power supply adjustment,
- beam angle: 120°,
- color temperature: 4000K,
- size: 60x60 cm.



5-YEAR
WARRANTY

EFFICACY
150 lm/W

18-40
WATT

CAMARO

- cost-effective led panel,
- beam angle: 120°,
- color temperature: 4000K,
- size: 60x60 cm.



2-YEAR
WARRANTY

EFFICACY
105 lm/W

40
WATT





PRODUCT OF
POLAND



NEXLINE SLIM

- fixture with integrated **LED SAMSUNG** diodes,
- size: **120 cm**,
- beam angle: **120°**,
- color temperature: **4000K**,
- capability of connecting fixtures (up to 20 units).

5-YEAR
WARRANTY

EFFICACY
140 lm/W

42 WATT
(OPTIONAL
30/35W)

KOBI LIGHT



LINEAR FIXTURES

The linear fixtures, Nexline Slim and Koline, support both suspended and surface-mounted installations and come with a 5-year warranty. Different variants can be equipped with accessories, such as a prismatic diffuser or additional reflectors, and can be seamlessly linked in a line.

KOLINE

- beam angle: **90°** or **105°**,
- color temperature: **4000K**,
- size: **120 cm**,
- capability of connecting fixtures (up to 20 units) - option on request.



5-YEAR
WARRANTY

EFFICACY
120-130 lm/W

20-40
WATT

FLUSH MOUNT LIGHT

Surface-mounted ceiling lights and recessed fixtures are ideally suited for corridors, stairwells, and office spaces.

Our extensive product portfolio includes **variants equipped with integrated motion sensors or an extended warranty period**, among many other options.



SIGARO

- beam angle: 120°,
- color temperature: 4000K,
- available in **recessed and surface-mounted models available.**

5-YEAR
WARRANTY

EFFICACY
100 lm/W

6-24
WATT



DEFENDER

- **LX version** with adjustable microwave **motion sensor** (operation time, light intensity, and detection sensitivity settings)
- beam angle: **120°**,
- color temperature: **4000K**,
- size: **ø 300 mm**,
- ingress protection: **IP66**.

3-YEAR
WARRANTY

EFFICACY
100 lm/W

18-24
WATT



NAIROS

- beam angle: **120°**,
- size: **ø 200/ø 300/ø 400**,
- ingress protection: **IP65**,
- available version with adjustable motion sensor (remote control included).
- adjustable color temperature **CCT: 3000/4000/6500K**.

3-YEAR
WARRANTY

EFFICACY
(WHITE/BLACK)
105/95
lm/W

12-36 WATT

NEXEYE

- beam angle: **110°**,
- color temperature: **4000K**,
- size: **ø 140/ø 190/ø 228 mm**,
- the fixture maintains an **IP44 protection rating in the case of recessed installation**,
- optional DALI power supply.

5-YEAR
WARRANTY

EFFICACY
110 lm/W

OPTIONAL
DALI

10/20/30
WATT



ANICA

- beam angle: 90° or 120°,
- color temperature: 4000K,
- size: ø 280/ø 320/ø 360 mm,
- built-in ZHAGA socket,
- ingress protection: IP65.



7-YEAR
WARRANTY

DIMMABLE
1-10V

EFFICACY
180 lm/W

100/150/200
WATT



NINA

- beam angle: 90° or 120°,
- color temperature: 4000K,
- size: ø 240/ø 280/
ø 320 mm,
- ingress protection: IP65.

5-YEAR
WARRANTY

DIMMABLE
1-10V

EFFICACY
160 lm/W

100/150/200
WATT

RIO PRO

- beam angle: 120°,
- color temperature: 4000K,
- size: ø 240/ø 285/ø 325 mm,
- **SAMSUNG LED** diode,
- ingress protection: IP65,
- impact resistance: IK10.



5-YEAR
WARRANTY

EFFICACY
140 lm/W

100/150/200
WATT



NICO

- high bay linear fixture,
- beam angle: 60°x90°,
- color temperature: 4000K,
- size: 547x150x130 mm,
- ingress protection: IP65.

5-YEAR
WARRANTY

EFFICACY
170 lm/W

120 WATT



INDUSTRIAL FIXTURES

We offer **high bay fixtures**, **dedicated to warehouse and manufacturing spaces**, in various **versions**: featuring power-switching capability, certification from the National Institute of Hygiene (PZH), a dimming option, and a warranty of up to 7 years.

INDUSTRIAL LINEAR FIXTURES

In more demanding conditions, industrial linear fixtures excel by offering a **high level of resistance to dust and moisture penetration.**



NEGRO

- hidden hermetic connector,
- beam angle: 120°,
- color temperature: 4000/6000K,
- ingress protection: IP65.

3-YEAR
WARRANTY

EFFICACY
120 lm/W

20-60 WATT

CORTEZ 3

- color temperature: 4000K,
- beam angle: 120°,
- ingress protection: IP65,
- National Institute of Hygiene (PZH) certificate.

3-YEAR
WARRANTY

EFFICACY
100 lm/W

18/36/45
WATT



the same, yet different...

Wondering how to save money?
**Remember that choosing
the cheapest offer doesn't
always pay off.**



Slimmeddown,
fragile latch.

**CHEAP COMPETITOR'S
fixture.**



Reinforced,
**durable
latch.**



HERMIC
kobi®

PARAMETER

Quality matters!

LED T8 **Kobi®**




DUAL-LAYER COATING

glass with good heat dissipation



thin layer of heatconductive
PBT plastic for
breakage protection

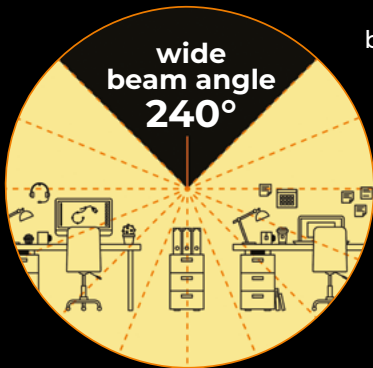

aluminum PCB plate,
high-EFFICACY LED



CCG CONVERTER

NO FLICKERING

SHORT-CIRCUIT
PROTECTION





color
rendering index
RA>80

COMPARISON

LED T8

NO PBT COATING

glass only, without
a protective layer
against breakage

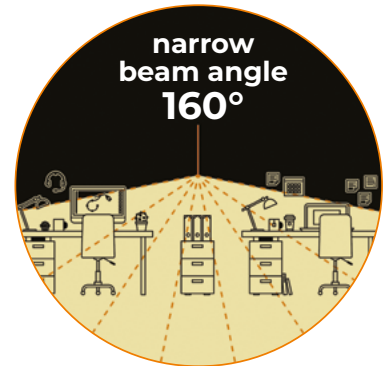

epoxy PCB plate,
low-EFFICACY LED

RC RECTIFIER CIRCUIT

FLICKERING

NO SHORT-CIRCUIT
PROTECTION



color
rendering index
RA=70





HERMETIC

- single or double fixture,
- size: 60/120/150 cm,
- ingress protection: IP65,
- replaceable light source.

2-YEAR
WARRANTY



HERMIC

- single or double fixture,
- size: 60/120/150 cm,
- ingress protection: IP65,
- replaceable light source.

2-YEAR
WARRANTY




T8 PREMIUM

- color temperature: 3000/4000/6500K,
- size: 60/120/150 cm
- can operate with a magnetic ballast using the KOBI starter.

3-YEAR
WARRANTY

EFFICACY
120 lm/W

9/18/22
WATT

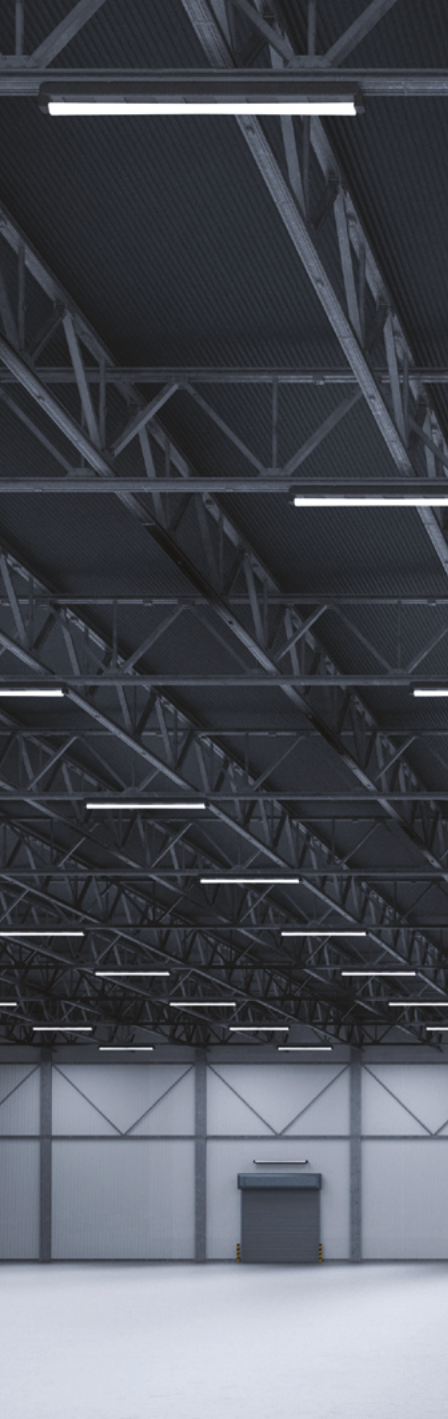

NEXFORCE

- ingress protection: **IP65**, with integrated LED diodes,
- size: **60/126/156 cm**,
- beam angle: **120°**,
- color temperature: **4000K**,
- **FAST CONNECT SYSTEM** with pass-through wiring.

5-YEAR
WARRANTY

EFFICACY
150 lm/W

20-80
WATT



HPL

- **single** or **double** fixture,
- beam angle: **90°** or **120°**,
- color temperature: **4000/5000K**
- ingress protection: **IP65**.

5-YEAR
WARRANTY

OPTIONAL
DALI

EFFICACY
130/155 lm/W

30-150
WATT

LED NEXFORCE

12 x 60W

gives you

150 lm/W

needs only

0,72 kW

VS*

LED T8

42 x 36W

gives you

53,3 lm/W

needs „only“

1,512 kW

* provided comparison data was calculated for
LED NEXFORCE 60W and LED T8 36W
installed in a 200 m² warehouse area
with no additional lighting

LED NEXFORCE

feel the power of saving

OUTDOOR FIXTURES

We offer street lighting fixtures with specialized road and park light distribution patterns, ensuring optimal illumination through precision-engineered lenses. These fixtures come with an extended warranty. Additionally, **our portfolio includes solar street fixtures with remote control functionality and power supplies compatible with the DALI system.**



VESPA PRO

- possibility of adjusting the luminaire by **180°**,
- wall or pole-mounted installation possible
ø 60 mm,
- beam angle: **140°x90°**,
- color temperature: **4000K**,
- ingress protection: **IP66**.

5-YEAR
WARRANTY

EFFICACY
140 lm/W

40-200 WATT





SOLAR LED STREET

- solar LED fixture with a remote-controlled **motion and light intensity sensor**,
- beam angle: **140°x 70°**,
- color temperature: **4000K**,
- **replaceable battery**
LiFe P04 9,6V/12000 mAh,
- ingress protection: **IP65**.

5-YEAR
WARRANTY

EFFICACY
120 lm/W

15/40 WATT



MASTER STREET

- built-in **DALI2** power supply and a **NEMA 5P** socket,
- beam angle: **150°x75°**,
- color temperature: **4000K**,
- ingress protection: **IP66**.

5-7-YEAR
WARRANTY

EFFICACY
170 lm/W

35-120 WATT



A low-angle, black and white photograph of a floodlight mounted on a corrugated metal roof. The floodlight is illuminated, casting a bright glow and creating a lens flare effect. The roof's ridges run diagonally across the frame. The background is a cloudy sky.

FLOODLIGHTS

Our floodlights allow for a wide range of applications - from illuminating driveways and building entrances to stadium lighting.

We offer models that come with an extended warranty and are equipped with a prismatic dispersion lens. We are dedicated to tailoring solutions to meet the specific requirements and expectations of our customers.

SEUL

- beam angle: 110°,
- color temperature: 4000K,
- ingress protection: IP65.



5-YEAR
WARRANTY

EFFICACY
130 lm/W

50-200
WATT

US DIM

- beam angle: 60 or 90°,
- option to exchange the lens for 25° or 55°x125°,
- color temperature: 5000K,
- ingress protection: IP66.



5-YEAR
WARRANTY

DIMMABLE
1-10V

EFFICACY
150 lm/W

300/500
WATT

LED US DIM

500W

77500
LUMEN



LED US DIM

300W

45200
LUMEN



kobi 

LED US



**LED US
500W DIM**

VS

**TRADITIONAL
LIGHT SOURCES**

		SODIUM LAMP	METAL HALIDE LAMP
POWER	500 W	750 W	1 100 W
EFFICIENCY	150 lm/W	100 lm/W	75 lm/W
LED LIFE SPAN	110 000 h	25 000 h	12 000 h



KOBI LIGHT SP. Z O. O.
35-105 RZESZÓW,
UL. BOYA-ŻELEŃSKIEGO 2

